

Technical Information

Field Xpert SMT70

Universal, high-performance tablet PC for device configuration in Ex Zone 2 and non-Ex areas



Application

The Field Xpert SMT70 tablet PC for device configuration enables mobile plant asset management in hazardous (Ex Zone 2) and non-hazardous areas. It is suitable for commissioning and maintenance staff. It manages Endress+Hauser and third-party field instruments with a digital communication interface and documents the progress of the work. The SMT70 is designed as a complete solution. It comes with a pre-installed driver library and is an easy-to-use, touch-enabled tool for managing field devices throughout their entire life cycle.

Your benefits

- High-performance, robust tablet with large 11.6" display and a battery runtime of up to 14 hours.

- Touch-enabled device configuration software with a direct link to the Netilion Platform for optimized plant asset management.
- Pre-installed device driver libraries for all of the important industrial protocols.
- Fast connection to devices with a single click thanks to automatic hardware detection. Online application software and DTM/driver update service offer new functionality and maximum security.
- Integrated Heartbeat Verification incl. PDF documentation.
- Connection to Endress+Hauser Bluetooth and WLAN devices - perfect for difficult-to-access instruments.





Table of contents

About this document	3
Symbols used	3
Function and system design	4
Function	4
System design	4
Communication and data processing	8
Power supply	8
Supply voltage	8
Battery	8
Performance characteristics	9
Hardware	9
Software	9
Environment	10
Ambient temperature range	10
Storage temperature	10
Humidity	10
Operating height	10
Degree of protection	10
Shock resistance	10
Vibration resistance	10
Electromagnetic compatibility	10
Mechanical construction	12
Design, dimensions	12
Weight	12
Materials	12
Software operation	12
Certificates and approvals	12
CE approval	12
Radio approval	12
Ex approval	12
Ordering Information	13
Scope of delivery	13
Accessories	13
Documentation	13
Field Xpert SMT70	13
Field Xpert SMT77	13
Fieldgate PAM SFG600	13
Registered trademarks	13









About this document

Symbols used

Safety symbols

Symbol	Meaning
	DANGER! This symbol alerts you to a dangerous situation. Failure to avoid this situation will result in serious or fatal injury.
	WARNING! This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in serious or fatal injury.
	CAUTION! This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in minor or medium injury.
	NOTE! This symbol contains information on procedures and other facts which do not result in personal injury.

Symbols for certain types of information


Symbol	Meaning
	Permitted Procedures, processes or actions that are permitted.
	Preferred Procedures, processes or actions that are preferred.
	Forbidden Procedures, processes or actions that are forbidden.
	Tip Indicates additional information.
	Reference to documentation.
	Reference to page.
	Reference to graphic.
	Visual inspection.

Function and system design

Function

The Field Xpert SMT70 tablet PC for universal device configuration supports protocols such as HART, PROFIBUS DP/PA, FOUNDATION Fieldbus and Modbus, the Endress+Hauser service protocols (CDI, ISS, IPC and PCP), and connection to Endress+Hauser Bluetooth devices. The devices can be connected directly via a suitable interface e.g. a modem (point-to-point), a bus system (point-to-bus) or a wireless connection (WLAN/Bluetooth). The Field Xpert software package is fast, easy and intuitive to use. The Field Xpert device library has more than 2,700 pre-installed device and communication drivers. They can be used to operate practically all HART and FOUNDATION Fieldbus devices (FieldComm Group libraries). Furthermore all Endress+Hauser field device drivers are installed. Further device drivers (DTMs) can be installed additionally. The generic HART DTM and PROFIBUS profile DTMs also enable operation of all the important basic functionalities of the relevant field devices.

System design

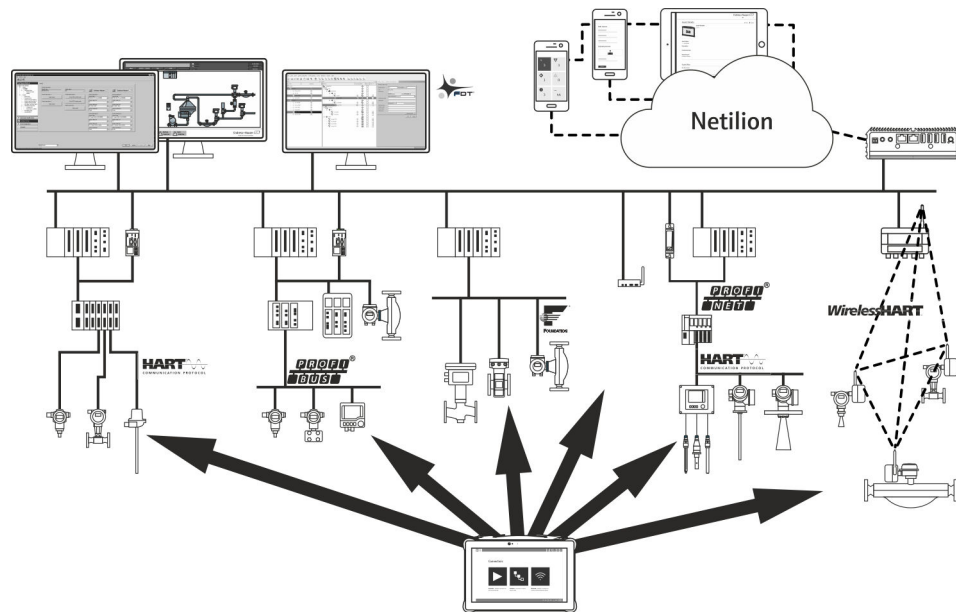

1 Network architecture


The following modems/interfaces are supported by the Field Xpert SMT70 tablet PC:

- HART
 - Commubox FXA195 (4 to 20 mA)
 - MACTek Bluetooth modem (4 to 20 mA)
 - Memograph RSG45 (4 to 20 mA)
 - MACTek USB modem (4 to 20 mA)
 - Softing mobiLink
 - Fieldgate SFG250
 - Tank Scanner NXA820
- HART via PROFINET together with Fieldgate PAM SFG600
- PROFIBUS
 - Softing PROFlusb
 - Softing PBpro USB
 - Softing mobiLink
 - Fieldgate SFG500
- FOUNDATION Fieldbus
 - NI USB
 - Softing mobiLink
 - Softing FFusb

- Modbus
 - Modbus serial
- WirelessHART
 - WirelessHART adapter SWA70
 - WirelessHART Fieldgate SWG70
- Endress+Hauser service interfaces
 - Commubox FXA291
 - Commubox FXA193
 - TXU10 V2
 - TXU10 V1
 - CDI USB
 - CDI TCP/IP

HART point-to-point connection via Commubox FXA195

This diagram shows a HART point-to-point connection with an FXA195 USB/HART modem. If an FXA195 is connected to the computer, the Field Xpert SMT70 tablet PC can connect to the device automatically.

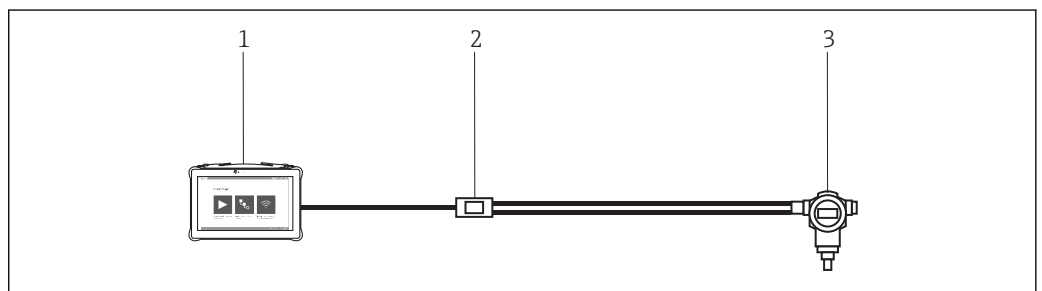


2 Point-to-point connection with a HART field device

- 1 Field Xpert SMT70 tablet PC
- 2 HART Commubox FXA195
- 3 Field device

To establish communication with the HART device, a resistor of at least 250 Ω must be provided in the circuit. The way in which this is done depends upon the system architecture and power source used. Please read the FXA195 manual carefully.

Connection via WLAN and Bluetooth


This diagram shows how to establish a connection to a WLAN-enabled or Bluetooth-enabled Endress+Hauser device.

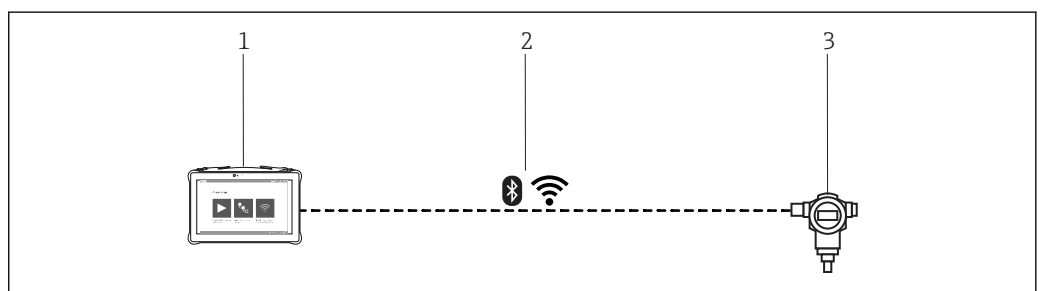

3

- 1 Field Xpert SMT70 tablet PC
- 2 WLAN or Bluetooth
- 3 Field device

HART point-to-point connection via MACTek Bluetooth modem

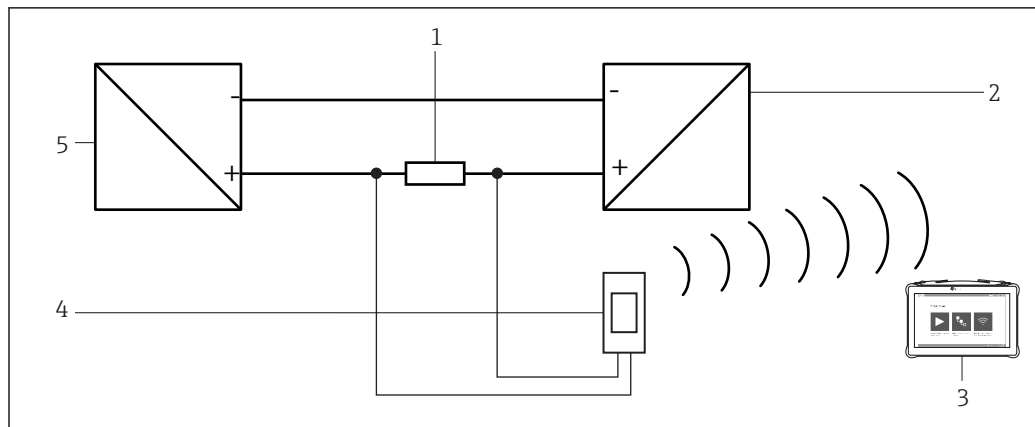


4 Point-to-point connection via a load resistor

- 1 Load resistor: 250 to 1 100 Ω
- 2 HART device
- 3 Field Xpert SMT70 tablet PC
- 4 VIATOR Bluetooth modem
- 5 Transmitter power supply unit

CDI point-to-point connection


This diagram shows a CDI point-to-point connection with a Commubox FXA291 interface. If this Commubox is connected to the computer, the Field Xpert SMT70 tablet PC can connect to the device automatically.

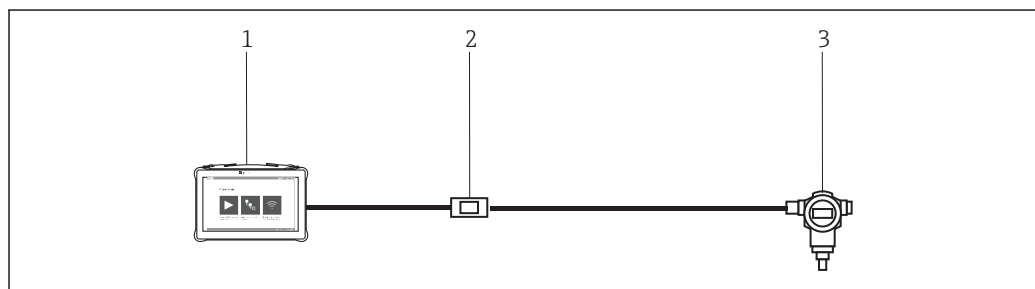

5 CDI point-to-point connection with a field device

- 1 Field Xpert SMT70 tablet PC
- 2 Commubox FXA291 CDI
- 3 Field device with CDI interface

HART via PROFINET

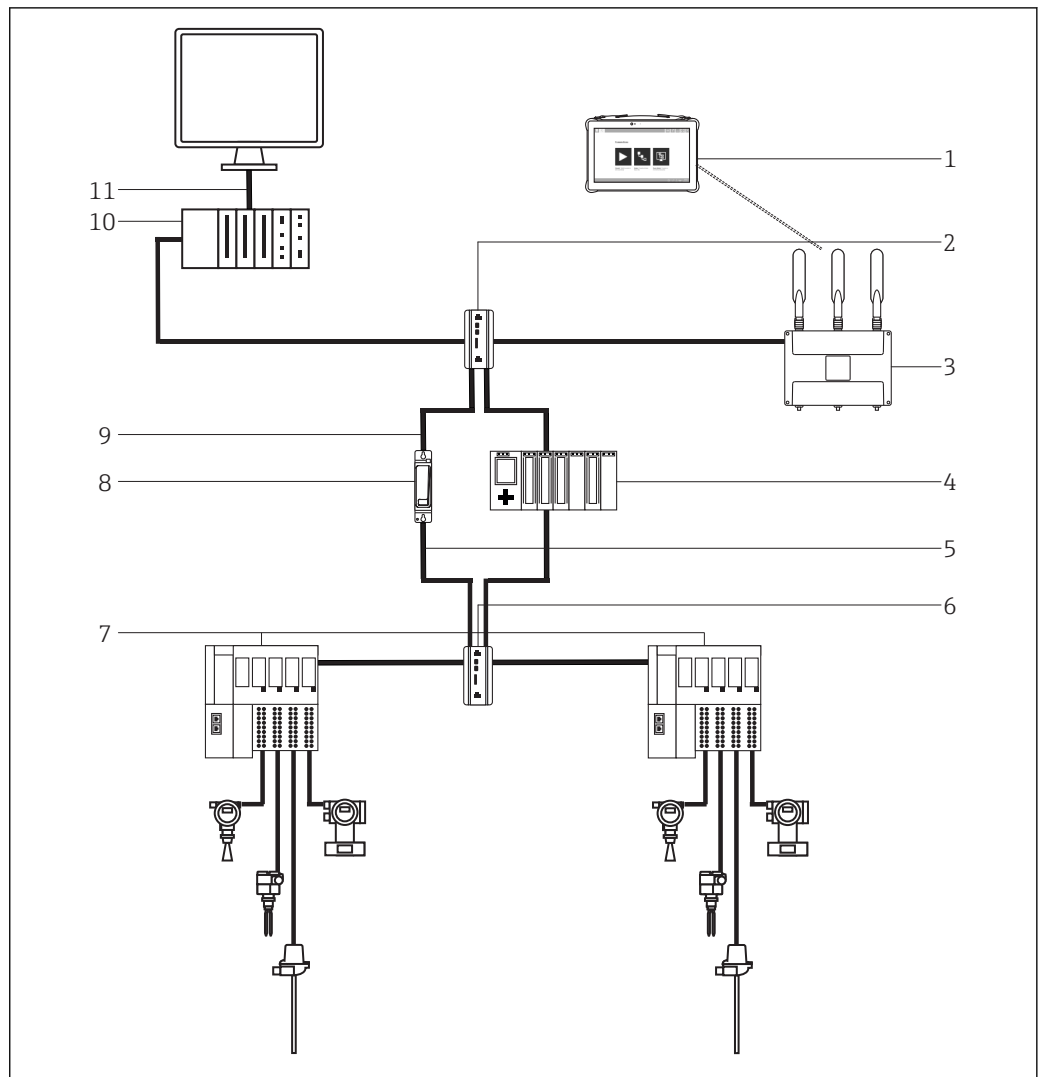


6 Network architecture

- 1 Field Xpert SMT70 tablet PC
- 2 Switch
- 3 Wireless router
- 4 PROFINET controller
- 5 PROFINET segment ETH1
- 6 PROFINET switch
- 7 Siemens ET200SP IM 155-6PN HF
- 8 Fieldgate PAM SFG600
- 9 Plant network PAM Client ETH2
- 10 Firewall
- 11 Office network

PROFIBUS point-to-bus connection

This diagram shows how the connection from PROFIBUS DP to PROFIBUS PA can be established using a Siemens DP/PA Link or a Pepperl+Fuchs SK3.

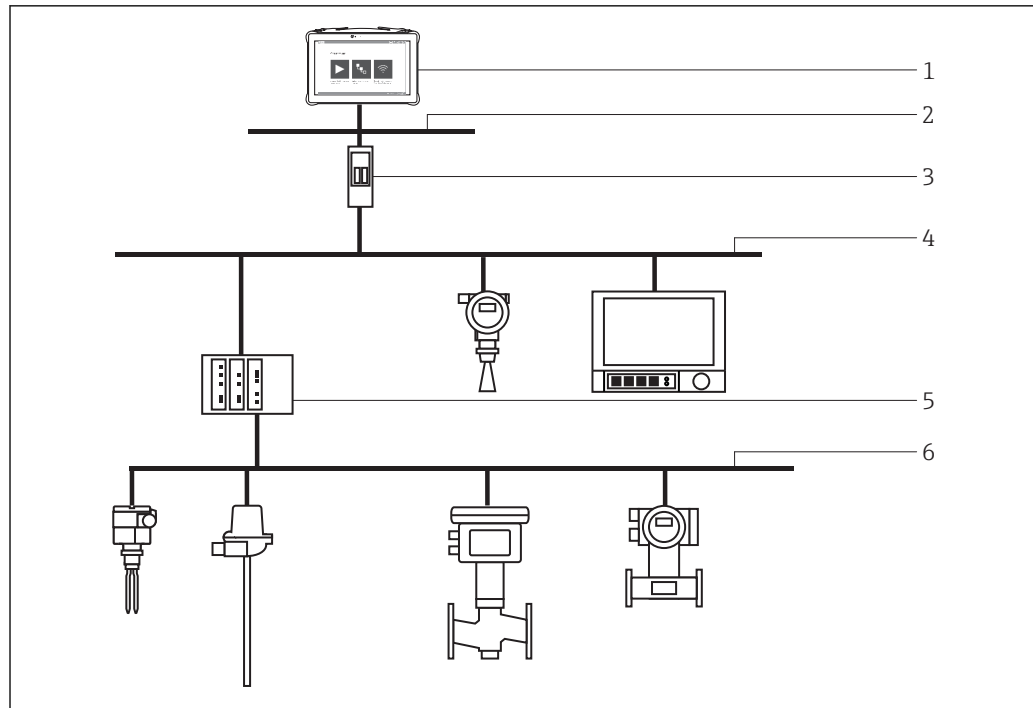

7 PROFIBUS point-to-bus connection via Fieldgate SFG500

- 1 Field Xpert SMT70 tablet PC
- 2 Ethernet
- 3 Fieldgate SFG500
- 4 PROFIBUS DP
- 5 Segment coupler
- 6 PROFIBUS PA

Communication and data processing

USB	2 x USB 3.0
Wireless LAN	Intel Wireless AC7260 802.11 a/b/g/n/ac, DUAL Band WLAN
Bluetooth	Bluetooth 4.0 BLE, Class 1
Wireless WAN + GPS	4G LTE WWAN + 12 channel GPS (optional)

Power supply

Supply voltage

Voltage	19 V
Current	3.42 A
Capacity	65 W


Battery


Replaceable, rechargeable lithium polymer battery


Type	R11AH	R11AH2
Voltage	11.1 V _{DC}	11.1 V _{DC}
Capacity	4 100 mAh (45 Wh)	7 800 mAh (86 Wh) (optional)
Battery life	Up to 7 h	Up to 14 h

Performance characteristics


Hardware	
CPU	Intel Core i5-5200U (2.2 to 2.7 GHz)
Working memory	8 GB with DDR3L adapter
Storage	256 GB SSD M2-SATA in the robust version
User interface	11.6" (1366 x 768) LCD display, with Gorilla Glass protector Capacitive multi-touch screen Optical bonding, sunlight readable, LCD (730 Nit) Ambient light sensor
Keys	On/off Volume Touch button for Windows Touch button for barcode/camera Programmable touch button
Audio	Speaker 70 dB @ 0.5 m Microphone
Scanner	1D/2D barcode scanner
Camera	2 MP camera on the front 5 MP camera on the back with auto focus and LED flash with 1 500 mcd Supports geotagging (optional)
Sensor	Integrated acceleration sensor, gyroscope and eCompass
Connections	Headphones output jack Microphone input jack Docking port Extension connection for add-on modules HF pass-through socket for WWAN and GPS
Expansion slots	Micro SD card slot, support for SDHC/SDXC SIM card slot for WWAN data communication
Software	
Operating system	Windows 10 IoT Enterprise
Configured software	Touch-enabled device configuration software optimized for Field Xpert
Standard software	Standard configurable Windows graphical user interface with icons, short cuts etc.

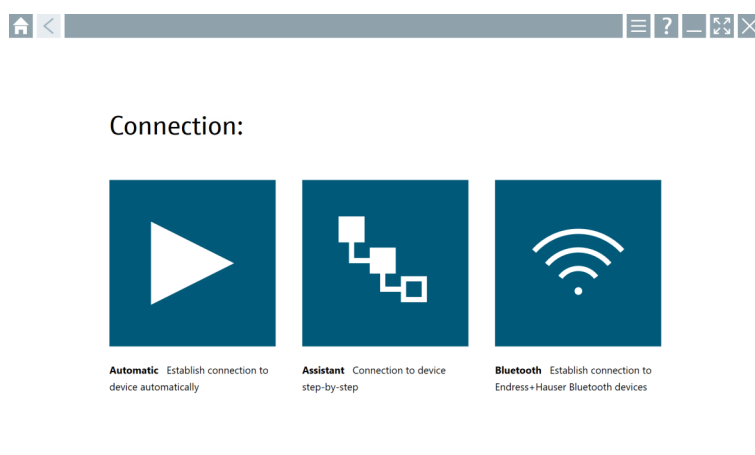

 8 Start screen with one-click automatic scan button

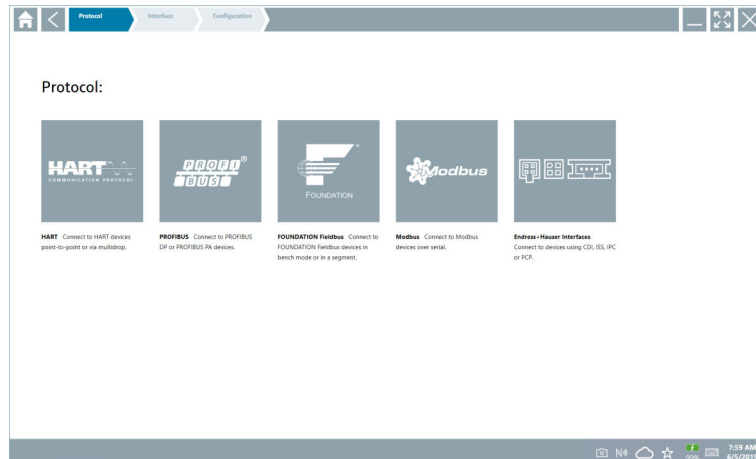

9 Protocol selection for manual selection of connection

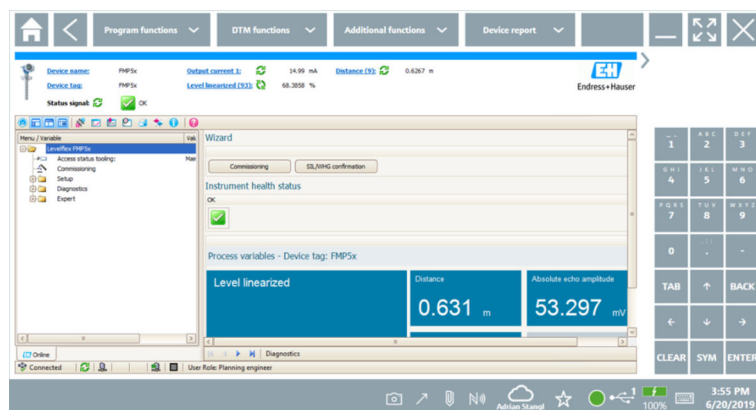

10 Device configuration

Environment

Ambient temperature range	-10 to 55 °C (14 to 131 °F)
Storage temperature	-20 to 60 °C (-4 to 140 °F)
Humidity	5 to 95%
Operating height	Max. 4 572 m (15 000 ft)
Degree of protection	IP65
Shock resistance	<ul style="list-style-type: none"> ■ MIL-STD 810G 516.6 Procedure IV ■ 6 impacts from a height of 1.2 m (4 ft) onto plywood over concrete
Vibration resistance	MIL-STD 810G 514.6 Procedure I Cat. 24, Fig. 514.6E-1
Electromagnetic compatibility	<p>Interference conformance to:</p> <ul style="list-style-type: none"> ■ EN 55022: 2010+ AC: 2011 ■ EN 55022 Class B ■ EN 61000-3-2 ■ EN 61000-3-3


Interference immunity:

- EN 55024: 2010
- IEC 61000-4-2
- IEC 61000-4-3
- IEC 61000-4-4
- IEC 61000-4-5
- IEC 61000-4-6
- IEC 61000-4-8
- IEC 61000-4-11

Mechanical construction

Design, dimensions

Standard version: 298.5 mm · 192 mm · 20 mm (11.4 in · 7.48 in · 0.78 in)

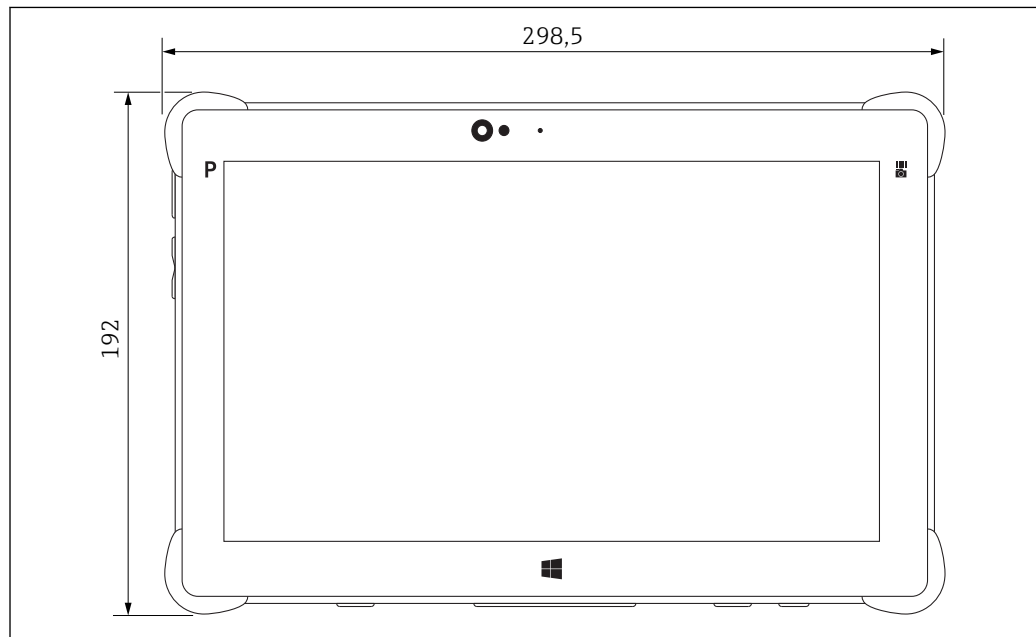

11 Front view

Weight

1.2 kg (2.65 lb) with standard battery

Materials

Outer housing: MN-3600 type polycarbonate

Inner housing: AlMg metal, type AZ91D

Software operation

- Automatic connection to field devices or via wizard
- Choice of languages within Field Xpert software:
AR, CS, DE, ES, FI, FR, ID, IT, JA, KO, NL, PL, PT, RU, SA, SV, TH, TR, VI, ZH
- DTM graphical user interface and language depend on the device and supplier

Certificates and approvals

CE approval

Field Xpert SMT70 meets all the legal requirements of the relevant EU directives. The manufacturer has affixed the CE mark as confirmation that the Field Xpert SMT70 has been successfully tested.

Radio approval

CE, FCC, IC

Ex approval



This section applies to tablet PC:

- Field Xpert SMT70-B1... (ATEX)
- Field Xpert SMT70-C1... (NEC/CEC)
- Field Xpert SMT70-I1... (IECEX)

ATEX (Europe)

- ATEX II 3G Ex ic IIC T4 Gc IP64
- ATEX II 3D Ex ic IIIB T135°C Dc IP 64

NEC/CEC (North America)

- NEC/CEC Class 1, Div. 2, Group A-D T4
- NEC/CEC Class 1, Zone 2, Group IIC T4

IECEX (International)

- IECEX Ex ic IIC T4 Gc IP64
- IECEX Ex ic IIIB T135° Dc IP64

Ordering Information

Please contact your Endress+Hauser sales center for detailed information on the product structure:
www.addresses.endress.com or at www.endress.com/smt70

Scope of delivery

The scope of delivery comprises:

- Field Xpert SMT70 tablet PC with handle
- AC charger (100 to 240 V_{AC}, 1.5 A, 50 to 60 Hz) with EU connecting cable and international adapter set for 150 countries
- Software and interfaces/modem as per order

Accessories

Optional accessories:

- X-strap
- Shoulder strap
- Leather case
- Office docking station (2 x USB 3.0, 2 x USB 2.0, 1 x RS232, HDMI, 1 Gbit Ethernet)
- Vehicle docking station with vehicle adapter (2 x USB 3.0, 2 x USB 2.0, 1 x RS232, HDMI, 1 Gbit Ethernet, WWAN + GPS antenna connection)
- Extra battery, high-capacity 7 800 mAh
- Extra battery, standard capacity 4 100 mAh
- Battery charger

Please contact your Endress+Hauser sales center for detailed information on accessories:
www.addresses.endress.com or at www.endress.com/smt70

Documentation

Field Xpert SMT70

- Operating Instructions BA01709S/04/EN
- Innovation Brochure IN01069S/04/EN

Field Xpert SMT77

- Technical Information TI01418S/04/EN
- Operating Instructions BA01923S/04/EN

Fieldgate PAM SFG600

- Technical Information TI01408S/04/EN
- Brief Operating Instructions KA01400S/04/EN

Registered trademarks

Windows 10 IoT Enterprise® is a registered trademark of Microsoft Corporation, Redmond, Washington, USA.

Intel® Core™ is a registered trademark of Intel Corporation, Santa Clara, USA.

Durabook is a registered trademark of Twinhead International Corp., Taiwan.

FOUNDATION™ Fieldbus is the trademark of the FieldComm Group, Austin, TX 78759, USA.

HART®, WirelessHART® is the registered trademark of the FieldComm Group, Austin, TX 78759, USA.

PROFIBUS® is a registered trademark of the PROFIBUS User Organization, Karlsruhe/Germany.

Modbus is the registered trademark of Modicon, Incorporated.

All other brand and product names are trademarks or registered trademarks of the companies and organizations in question.

www.addresses.endress.com
